


# APV12

Floor drain 150×150/110 mm side outlet, stainless steel grid, collar-2nd level insulation, wet odour trap

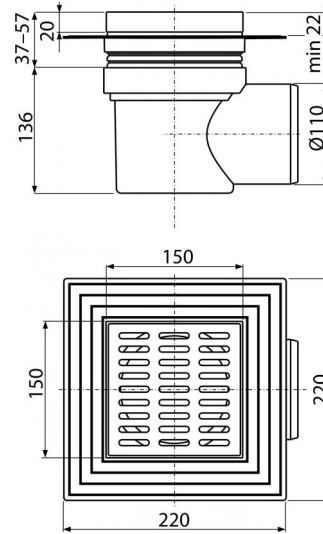

### Application

For wheelchair access  
 For drainage of floor level showers  
 For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

### Features

- Side connection to waste Ø110 mm
- Collar-2nd level of insulation for connecting to waterproofing layer beneath the pavement
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Stainless steel grid 145x145x5 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 37-57 mm
- High capacity drain

### Scope of supply

- Floor drain throat 150x150 mm
- Collar-2nd level of insulation Ø150
- Stainless steel grid
- Seal kit
- Drain body Ø110 mm, side outlet
- Wet odour trap

### Order number, Logistic information

Code	EAN	Weight (kus   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APV12	8594045937190	1,0372   8,2976   185,9500 kg	230x190x230   780x245x475 mm	8   160 pcs

Guarantee	Customs code	Norms
2/6 years	39269097	EN 1253

### Technical specifications

- Total installation height 173-193 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 110 mm
- Flow of the inlet grid 89 l/min
- Load class K3 300 kg
- Wet odour trap 51 mm